

Premier DX200 & CF20


Centrifugal extract and condensation control fans

The Premier range of centrifugal fans is designed specifically for domestic applications including bathrooms, shower rooms, toilets and utility rooms where longer duct runs are required. All models have a gloss white casing with a clean and sleek appearance. A two-part casing means Premier fans can be recess or surface mounted.

For wall fitting we recommend the VK10 kit (89120AW) which includes wall tube and external grille.

Key Features

- Ideal for longer duct runs
- Can be surface or recess mountable
- Weight - 2.2kg
- IP Rating - IPX5
- 2 year UK manufacturer guarantee

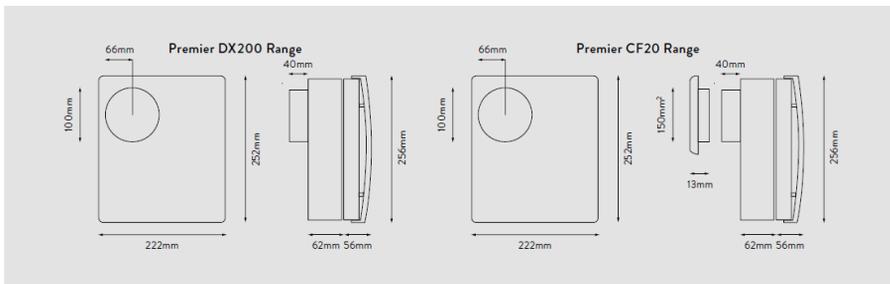

Product Selector		Condensation Control	Timer (adjustable 30s - 20m)	Pullcord (manual override)	Humidistat	Quick Visit Timer Delay (2mins)	Room Size Selector	Speeds	Trickle Ventilation Facility	Boost Ventilation Facility	Electrical Power Rating (W)
Model											
DX200	91013AW							2			14/27
DX200T	91014AW		✓			✓		4	✓		11/14/19/27
CF20	91015AW	✓		✓	✓		✓	4	✓	✓	11/14/19/27
CF20T	91016AW	✓	✓	✓	✓	✓	✓	4	✓	✓	11/14/19/27

Product Selector		Extract Performance (m ³ /h) (speed)				Extract Performance (l/s) (speed)				Sound Pressure Level (dBA@3m) (speed)			
Model		trickle	1	2	3	trickle	1	2	3	trickle	1	2	3
DX200	91013AW	•	59	100	•	•	17	28	•	•	20	42	•
DX200T	91014AW	42	59	84	100	10	17	24	28	20	20	37	42
CF20	91015AW	42	59	84	100	10	17	24	28	20	20	37	42
CF20T	91016AW	42	59	84	100	10	17	24	28	20	20	37	42